

Modelo GAK (Fixo Suportado Retangular com Vedação)



GAK-B





GAK-N





GAK06 - GAK08





GAK10 - GAK15




GAK20



GAK25



Item	Descrição	Qtd.
1	Bloco	1
2	Rolamento	1/1 cj.
3	Tampa	1
4	Bucha Espaçadora	2
5	Vedação	2
6	Porca Trava	1/1 cj.
7	Parafuso Allen Trava	2

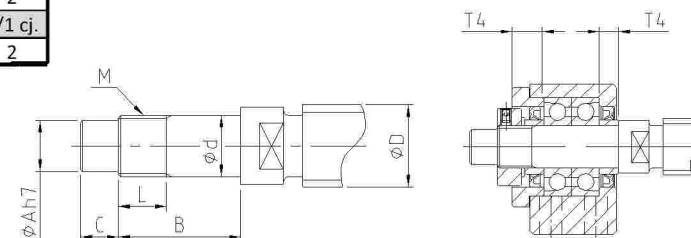

Modelo No.		Dimensões																		
		Ød	T	T1	T2	T3	W	W1	H	H1	N=0.02	C ⁺⁰ _{-0.02}	P	P2	P3	Ød1	Ød2	Z	M1	S
GAK06 B	GAK06 N	6	20	5,5	22	3,5	42	18	25	20	21	13	30	-	-	5,5	9,5	7	M3	12
GAK08 B	GAK08 N	8	23	7	26	4	52	25	32	26	26	17	38	-	-	6	11	12	M3	14
GAK10 B	GAK10 N	10	24	6,2	29,5	6	70	36	43	35	35	25	52	-	-	9	14	11	M3	16
GAK12 B	GAK12 N	12	24	6,2	29,5	6	70	36	43	35	35	25	52	-	-	9	14	11	M3	19
GAK15 B	GAK15 N	15	25	6,2	32	5	80	41	50	40	40	30	60	-	-	11	17	15	M3	22
GAK20 B	GAK20 N	20	42	10, 2	50	10	95	56	58	45	47,5	30	75	22	10	11	17	15	M4	30
GAK25 B	GAK25 N	25	48	13, 2	60	14	10 5	66	68	25	52,5	35	85	30	9	11	-	-	M5	35

Dimensões para Usinagem do Fuso							
Diâmetro nominal do Fuso	Diâmetro da extremidade	Dimensão da extremidade			Especificação do parafuso		Compr. espaçador
ØD	Ød	ØA	B	C	M	L	T4
8 / 10	6 -0,005 -0,012	5	27	8	M6*P0.75	6	5
10 / 12	8 -0,005 -0,012	6,5	31,5	7,5	M8*P1.0	7	5,5
12 / 14 / 15	10 -0,005 -0,012	8	36	15	M10*P1.0	11	5,5
14 / 15 / 16	12 -0,005 -0,012	10	36	15	M12*P1.0	11	5,5
18 / 20	15 -0,005 -0,014	12	47	20	M15*P1.0	13	6
25 / 28 / 30	20 -0,005 -0,014	17	62	25	M20*P1.0	17	11
28 / 30 / 32	25 -0,005 -0,014	22	75	18	M25*P1.5	20	15