




 Unidades de Rolamentos com Mancais em FoFo Nodular Tipo Esticador **MST**

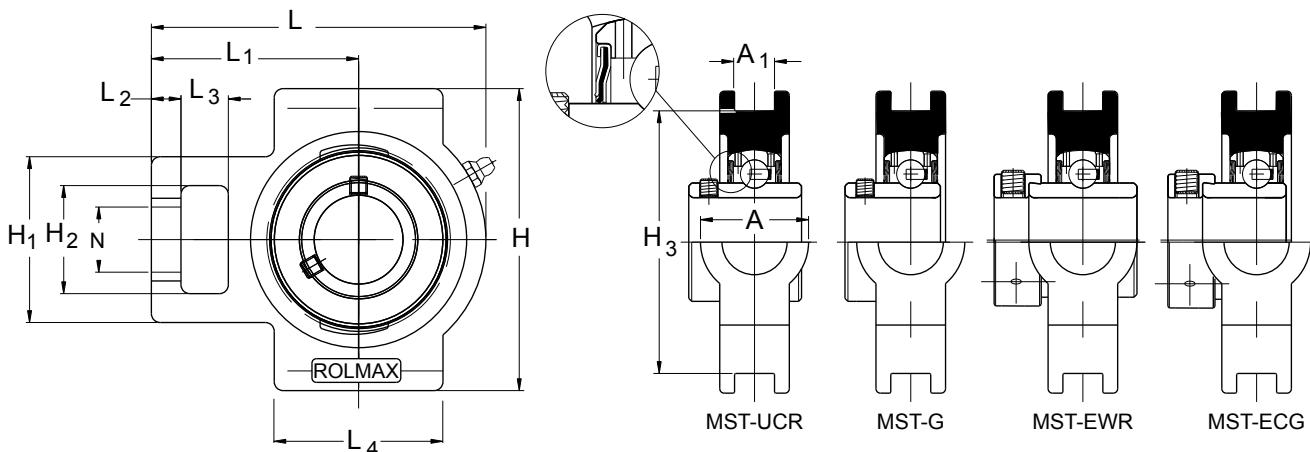

Diâmetro do eixo		Conjunto	Série do rolamento opcional p/ montagem (+)				Dimensões em milímetros e polegadas												Mancal	Rolamento Base	Peso kg Médio
mm	polegada		UCR	EWR	G	ECG	L	L ₁	L ₂	L ₃	L ₄	H	H ₁	H ₂	H ₃	A	A ₁	N			
25	-	MST-25	+				113	70	10	16	57	102	56	36,50	88,70	36,50	13,50	22	T-4	206 / 1230	1,45
	7/8	MST-7/8	+				4.449	2.755	0.394	0.630	2.244	4.016	2.205	1.437	3.492	1.437	0.532	0.867			
	1	MST-1	+																		
30	-	MST-30	+				129	78	13	16	64	102	64	36,50	88,70	36,50	13,50	22	T-5	207 / 1235	1,67
	1.3/16	MST-1.3 /16	+				5.079	3.071	0.512	0.630	2.520	4.016	2.520	1.437	3.492	1.437	0.532	0.867			
	1.1/4	MST-1.1/4	+	+	+	+															
35	-	MST-35	+				143	89	16	19	82	114	82	49	101,50	49	17,50	28,50	T-6	208 / 1240	2,56
	1.3/8	MST-1.3 /8	+				5.629	3.504	0.630	0.748	3.229	4.488	3.229	1.929	3.996	1.929	0.689	1.122			
	1.7/16	MST-1.7 /16	+																		
40	-	MST-40	+				145	89	16	19	83	117,50	82	49	101,50	49	17,50	28,50	T-7	209 / 1245	2,45
	1.1/2	MST-1.1/2	+				5.708	3.504	0.630	0.748	3.268	4.626	3.229	1.929	3.996	1.929	0.689	1.122			
45	-	MST-45	+				149	90	16	19	86	117,50	82	49	101,50	49	17,50	28,50	T-8	210 / 1250	2,72
	1.11/16	MST-1.11 /16	+				5.866	3.544	0.630	0.748	3.386	4.626	3.229	1.929	3.996	1.929	0.689	1.122			
	1.3/4	MST-1.3 /4	+																		
50	-	MST-50	+	+															T-9	211	4,34
	1.7/8	MST-1.7 /8	+				171,50	106,50	19	25,50	95	146	101	63,50	130	63,50	27	34,50			
	1.15/16	MST-1.15 /16	+				6.752	4.193	0.748	1.004	3.740	5.748	3.977	2.500	5.118	2.500	1.063	1.358			
	2	MST-2	+	+																	
55	-	MST-55	+				194	119,50	19,50	32	101	146	101	63,50	130	63,50	27	34,50	T-10	212	5,29
	2.3/16	MST-2.3 /16	+				7.638	4.705	0.768	1.260	3.977	5.748	3.977	2.500	5.118	2.500	1.063	1.358			
60	-	MST-60	+																T-11	214	7,86
	65	MST-65	+	+			224	137	21	32	120	167	111	70	150,70	70	27	41			
	2.7/16	MST-2.7 /16	+	+			8.819	5.394	0.827	1.260	4.725	6.575	4.370	2.756	5.933	2.756	1.063	1.614			
65	-	MST-65 R	+	+			232	140	21	32	120	167	111	70	150,70	70	27	41	T-12	215	8,54
	70	MST-70	+	+			9.134	5.512	0.827	1.260	4.725	6.575	4.370	2.756	5.933	2.756	1.063	1.614			
	2.11/16	MST-2.11 /16	+	+																	
75	-	MST-75	+				235	140	21	32	120	184	111	70	165	70	27	41	T-13	216	8,89
	2.15/16	MST-2.15 /16	+				9.252	5.512	0.827	1.260	4.725	7.244	4.370	2.756	6.496	2.756	1.053	1.614			
	3	MST-3	+																		
80	-	MST-80	+				260	162	29	38	157	198	124	73	173	79	46	47,50	T-14	217	13,32
	3.3/16	MST-3.3 /16	+				10.237	6.378	1.142	1.496	6.181	7.795	4.882	2.874	6.811	3.110	1.811	1.870			
	3.1/4	MST-3.1 /4	+																		
85	-	MST-85	+																T-15	218	14,86
	90	MST-90	+				266,50	165	29	38	152	216	127	73	190,40	79	46	48			
	3.7/16	MST-3.7 /16	+				10.492	6.496	1.142	1.496	5.984	8.504	5.000	2.874	7.496	3.110	1.811	1.890			
	3.1/2	MST-3.1 /2	+																		
95	-	MST-95	3095 G																T-16	3095 G	27,02
	100	MST-100	3095 G				317,50	190,50	32	38	190	260	152	89	234,80	98	55,50	54			
	3.15/16	MST-3.15 /16	3095 G				12.500	7.500	1.260	1.496	7.481	10.237	5.984	3.504	9.244	3.859	2.185	2.125			
100	4	MST-4	3095 G																		