




## Unidades de Rolamentos com Mancais Tipo Flange SFT

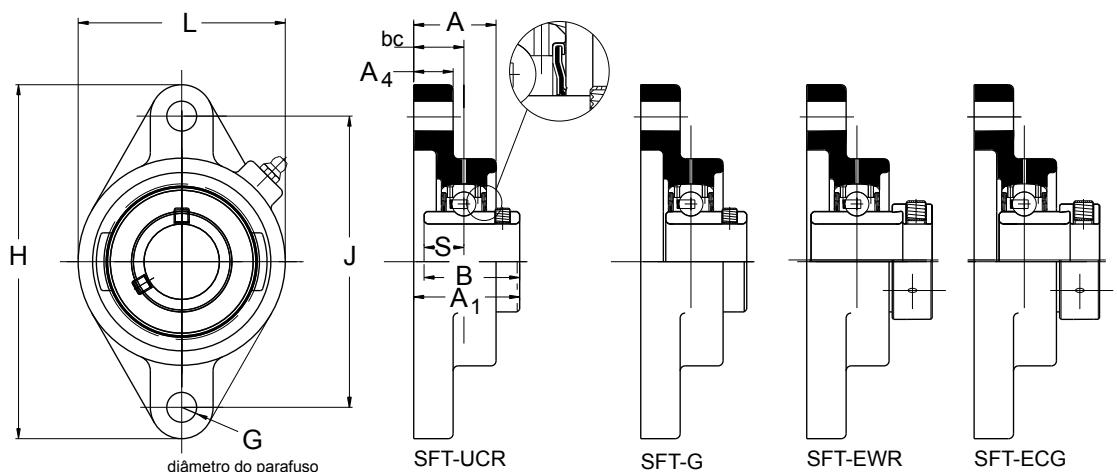

Diâmetro do eixo mm	Conjunto	Série do rolamento opcional p/ montagem (+)				Dimensões em milímetros e polegadas										Mancal	Rolamento Base	Peso kg Médio
		U C R	E W R	G	E C G	L	J	H	A <sub>t</sub>	A	A <sub>4</sub>	B	S	G	b c			
20 -	SFT-20	+	+	+	+	60,50	89,70	112	36,76	30,50	14	30,96	12,70	10	18,50	S-2	204 / 1220	0,51
- 3/4	SFT-3/4	+	+	+	+	2.382	3.532	4.410	1.447	1.200	0.551	1.219	0.500	3/8	0.728			
25 -	SFT-25	+	+	+	+	70	99	124	38,84	31,60	14,10	34,11	14,27	10	19			
- 7/8	SFT-7/8	+	+	+	+	2.756	3.898	4.882	1.529	1.244	0.555	1.343	0.562	3/8	0.748	S-3	205 / 1225	0,67
- 15/16	SFT-15/16	+	+		+													
- 1	SFT-1	+	+	+	+													
30 -	SFT-30	+	+	+	+	82,50	116	141	42,22	32,80	15,70	38,10	15,88	10	20			
- 1.1/8	SFT-1.1/8	+	+	+	+	3.248	4.567	5.551	1.622	1.291	0.618	1.500	0.625	3/8	0.787	S-4	206 / 1230	0,96
- 1.3/16	SFT-1.3/16	+	+	+	+													
- 1.1/4	SFT-1.1/4	+	+	+	+													
35 -	SFT-35	+	+	+	+	95	130	155,50	45,40	33	14,20	42,88	17,48	12	20			
- 1.3/8	SFT-1.3/8	+	+	+	+	3.740	5.118	6.122	1.787	1.299	0.559	1.688	0.688	1/2	0.787	S-5	207 / 1235	1,28
- 1.7/16	SFT-1.7/16	+	+	+	+													
40 -	SFT-40	+	+	+	+	105	143,70	171,50	53,18	37,40	15,20	49,23	19,05	12	23			
- 1.1/2	SFT-1.1/2	+	+	+	+	4.134	5.657	6.752	2.093	1.472	0.589	1.938	0.750	1/2	0.905	S-6	208 / 1240	1,86
45 -	SFT-45	+	+	+	+	111	148,50	179	53,18	36,80	15,80	49,23	19,05	14	23			
- 1.5/8	SFT-1.5/8	+	+	+	+	4.370	5.847	7.048	2.093	1.448	0.622	1.938	0.750	9/16	0.905	S-7	209 / 1245	1,91
- 1.11/16	SFT-1.11/16	+	+	+	+													
- 1.3/4	SFT-1.3/4	+	+	+	+													
50 -	SFT-50	+	+	+	+	116	157	189	58,54	43,20	18,30	51,59	19,05	14	26			
- 1.7/8	SFT-1.7/8	+	+	+	+	4.567	6.181	7.441	2.304	1.720	0.720	2.031	0.750	9/16	1.024	S-8	210 / 1250	2,16
- 1.15/16	SFT-1.15/16	+	+	+	+													
- 2	SFT-2	+	+	+	+													
55 -	SFT-55	+	+			133	184	216	62,33	47,70	21,50	55,55	22,22	16	29			
- 2.1/8	SFT-2.1/8	+	+			5.237	7.244	8.504	2.453	1.877	0.846	2.187	0.875	5/8	1.141	S-9	211	3,35
- 2.3/16	SFT-2.3/16	+	+															