

Modelo GAF (Livre Suportado Retangular)

Item	Descrição	Qtd.
1	Bloco	1
2	Rolamento	1/1 cj.
3	Anel Trava	1


GAF-B





GAF-N



GAF08 - GAF20

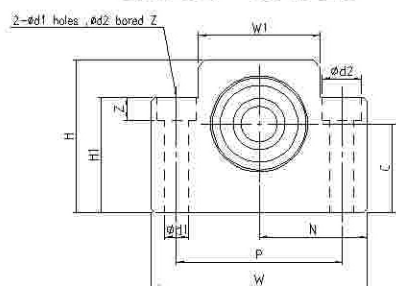

GAF25

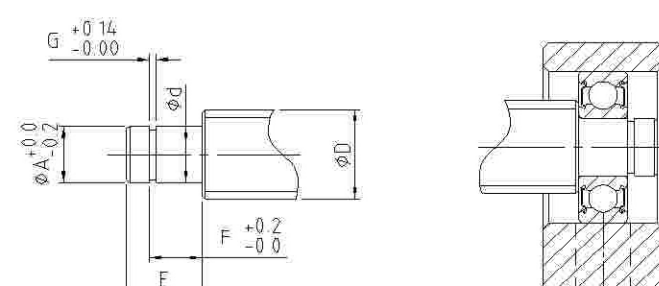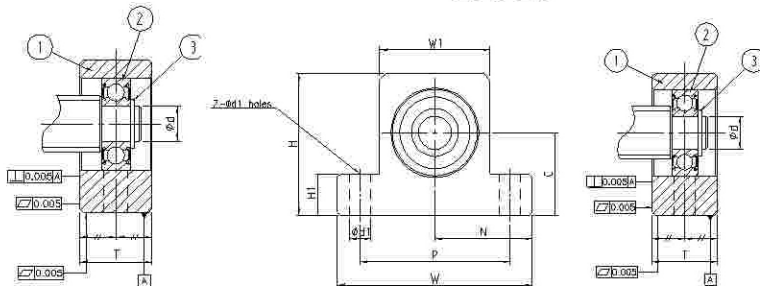

Modelo NO.		Dimensões											
		Ød	T	W	W1	H	H1	N=0.02	C $\begin{smallmatrix} +0 \\ -0.03 \end{smallmatrix}$	P	Ød1	Ød2	Z
GAF08 B	GAF08 N	6	15	52	25	32	26	26	17	38	6,6	11	12
GAF10 B	GAF10 N	8	20	70	36	43	35	35	25	52	9	14	11
GAF12 B	GAF12 N	10	20	70	36	43	35	35	25	52	9	14	11
GAF15 B	GAF15 N	15	20	80	41	50	40	40	30	60	9	14	11
GAF20 B	GAF20 N	20	26	95	56	58	45	47,5	30	75	11	17	15
GAF25 B	GAF25 N	25	30	105	66	68	25	52,5	35	85	11	-	-

Dimensões para Usinagem do Fuso						Anel Trava
Diâmetro nominal do Fuso	Dimensão do eixo	Dimensões p/ Montagem de Anel Trava				
ØD	Ød	ØA	E	F	G	
8 / 10	6 ^{-0,005 -0,012}	6	9	6,7	0,8	S 06
12 / 14 / 15	8 ^{-0,005 -0,012}	7,6	10	7,9	0,9	S 08
14 / 15 / 16	10 ^{-0,005 -0,012}	9,6	11	9,15	1,15	S 10
18 / 20	15 ^{-0,005 -0,014}	14,3	13	10,15	1,15	S 15
25 / 28 / 30	20 ^{-0,005 -0,014}	19	19	15,35	1,35	S 20
28 / 30 / 32	25 ^{-0,005 -0,014}	25	21	16,5	1,35	S 25